

Angular Contact Ball Bearing - Outer ring guided brass cage

Specifically designed to match the tough operating conditions found in oil-free screw compressors, its high strength outer ring guided brass cage and improved accuracy allows it to reach extremely high speed ensuring a long running life while minimizing downtime and maintenance costs.

Product Features

- Special internal design (different contact angles available)
- Increased limiting speed
- High strength outer ring guided brass cage
- High dimensional and running accuracy (P5)
- Narrow axial clearances or preloads

Benefits


- Long life
- High speed capabilities
- Reduced heat generation, vibration and noise

Condition Description

- High Accuracy
- High Load
- High Speed
- High Temperature

Industries

- Chemical and Pharmaceutical
- Industrial Pumps and Compressors
- Petrochemical

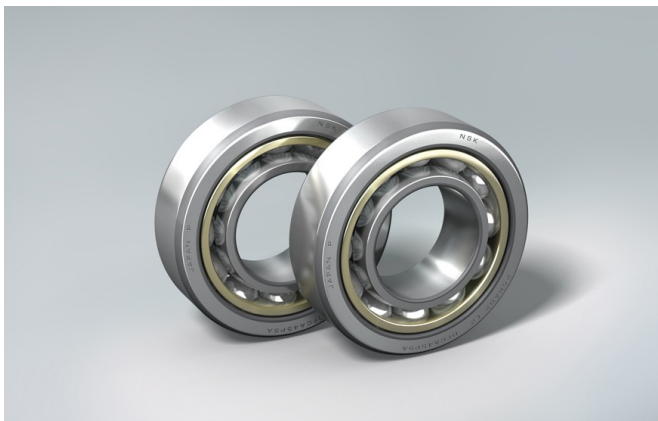

20 BA 02 A DF CA25 P5

Description

20	Nominal Bore Diameter
BA	Bearing Type Symbol (BA: 30° ; BN: 20° ; BT: 40° contact angle)
02	Dimension symbol
A	Internal Design (with outer ring guided brass cage)
DF	Arrangement Symbol (Face to Face)
CA25	Axial Clearance in μm
P5	Accuracy