

Self-Lube® Inserts with Flinger Seals

NSK's Inserts equipped with Flinger Seals have been specifically designed to provide the insert with additional protection from external contaminants such as stone projection or high pressure washdowns.

Product Features

- Efficient sealing "S" type
- Nitrile rubber lip bonded to steel flinger
- No contact between the lip and the outer ring
- Same speed limit as standard inserts
- Available for both setscrew and eccentric collar
- Locking device
- Large size range offered, including imperial options
- Inserts interchangeable with standard items

Benefits


- Longer bearing life due to additional protection
- Maintenance costs reduction
- High speed (Same speed limit as standard sealed inserts)
- Easy mounting
- Option delivered as standard

Condition Description

- Arduous Environments
- High Speed

Industries

- Agriculture
- Material Handling
- Textile and Leather

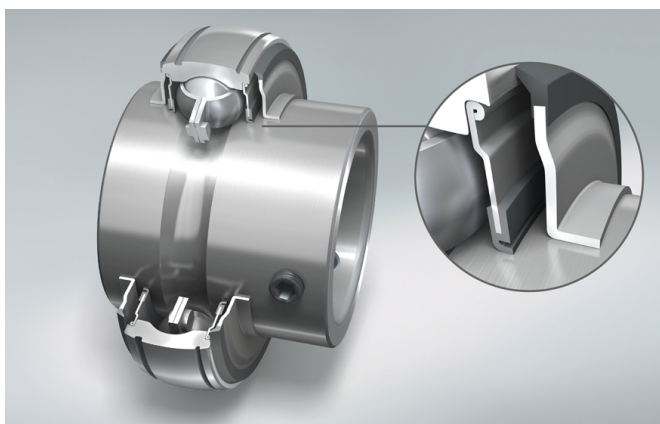

1030 - 30 DEC G FS

Description

1030	Insert with spherical O.D, long inner ring
-	
30	Bore Diameter
DEC	Eccentric collar lock with extended inner ring
G	Insert equipped with flinger seals
FS	Re-greasing facility